

Viewlock II KeySafe

viewLOCK II
VIDEO ENCRYPTION SYSTEM



Viewlock II Secondary Encryption Key Programmer

- *Programs Viewlock II with a Secondary Encryption Key.*
- *Stores up to 12 different pre-set Keys.*
- *Can also be used to clear the Secondary Encryption Key.*
- *Works with Viewlock II, microViewlock II and Audiolock II.*
- *Small size - 32mm x 58mm x 115mm*
- *Battery operated for field operation. (Estimated life is 4 years)*
- *Can be used almost anywhere!*

KeySafe is a convenient way of programming the Secondary Encryption Key in Ovation System's Viewlock II video encryption system without the use of a PC or laptop computer.

In addition to the Primary (factory set) Encryption Key, Viewlock II has a Secondary (user definable) Encryption Key which is only known by the end user. This allows Viewlock II encoders and decoders to be uniquely keyed as required. Also, in the highly unlikely event of a decoder entering the 'wrong hands', the Viewlock II system can be easily reprogrammed in a way that will only be known to the legitimate user.

Previously, the only way to program the Secondary Encryption Key has been directly with a PC or laptop which is not ideal for field operation. However once KeySafe has itself been programmed*, a serial interface cable is all that is additionally required.


KeySafe is battery operated with an estimated battery life in excess of four years.

*A copy of Ovation System's VL2-Talk software is required to program KeySafe and is supplied as part of the package along with all required serial cables for use with Viewlock II, microViewlock II and Audiolock II.



Ovation Systems Ltd
Springfield Barn
London Road
Milton Common
Oxfordshire, OX9 2JY, UK

Tel: +44 1844 279 638
Fax: +44 1844 279 071
Email: sales@ovation.co.uk
Web site: www.ovation.co.uk




1. Download up to 12 Keys to KeySafe



2. Program Viewlock II



Typical Application of KeySafe

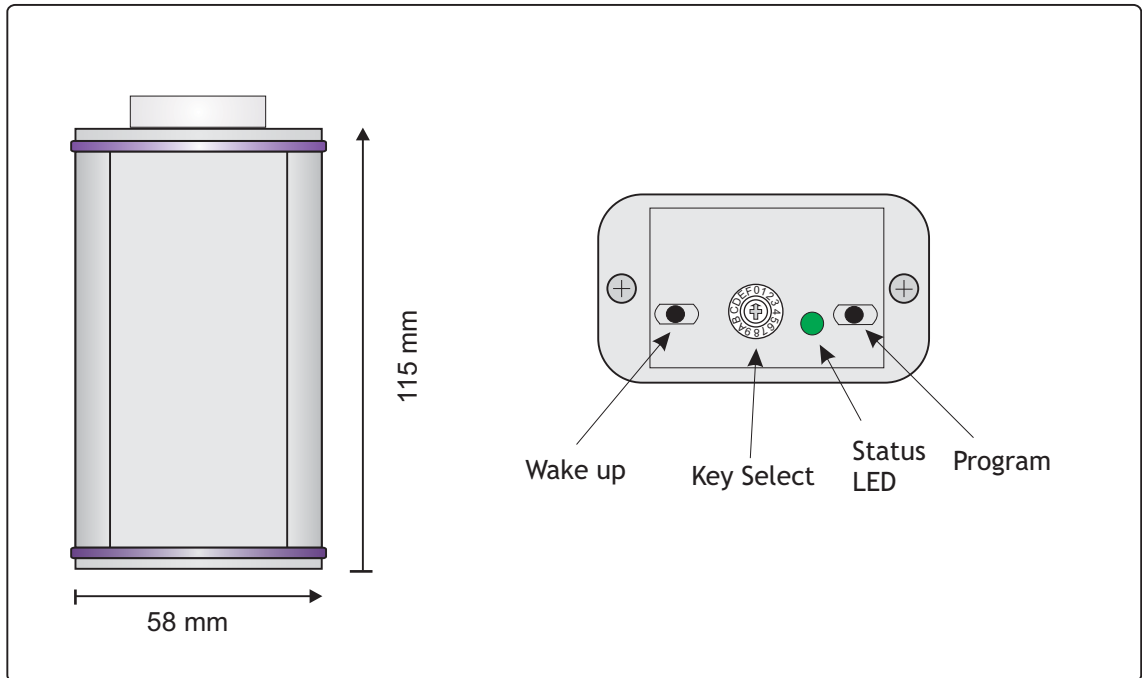

KeySafe Dimensions & Interfaces

Outline Specification

General:		Programming:	
Operating temperature range	0 to +55°C.	Number of secondary keys	12 + Secondary Key Clear.
Mechanical size (housed)	32 x 58 x 115 mm.	Compatibility	Viewlock II, microViewlock II & Audiolock II
Finish	Painted aluminum.	Other requirements	PC or Laptop with RS232 port to run VL2-Talk software.
Weight (housed)	170 g.		
DC power	Internal battery.		
Battery life	>4 years with average use		
Standard accessories	User guide, VL2-Talk software on CDROM, RS232 interconnecting cables, carry case.		
		Please note: Viewlock II, microViewlockII and Audiolock II are sold separately.	

Please note, the above information is preliminary and Ovation Systems reserves the right to change specifications without notice. E&OE.

